


Online UPS
 NP Series
 Three Phase
 10-400KVA



**Highly available, redundant,
 and scalable double-conversion
 on-line power protection**

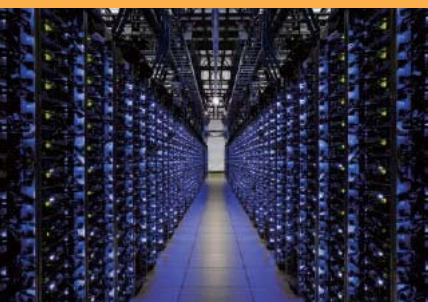

Features & Benefits

- High reliability configuration
- N+X parallel redundancy
- Wide input range
- Digital Control
- Stable operation
- Comprehensive protection
- User-friendly network management

Applications

- Finance, Telecommunication, Insurance
- Transportation, Tax, Military, Stock, Energy
- Education, Government, Manufacture, Enterprise
- Computer, Precision Instrument etc

Technical Specifications

Models	NP3310	NP3315	NP3320	NP3330	NP3340	NP3360	NP3380	NP33100	NP33120	NP33160	NP33200	NP33300	NP33400			
Capacity	10KVA	15KVA	20KVA	30KVA	40KVA	60KVA	80KVA	100KVA	120KVA	160KVA	200KVA	300KVA	400KVA			
Input																
Input Voltage	380VAC +/- 20% (3 phase)															
Input Frequency	40Hz ~ 65Hz (auto sensing)															
Input Power Factor	>0.95															
Output																
Output Voltage	380VAC (3 phase + neutral)															
Output Frequency	Input frequency synchronized															
Output Power Factor	0.8															
THD	<1% (linear load), <3% (non-linear load)															
Efficiency	95%(normal); 98%(eco)															
Crest Factor	3 : 1															
Overload Ability	60' / 10' / 1' (110% / 125% / 150%)															
Transfer Time	0ms															
Battery Voltage	192VDC (optional 240VDC / 384VDC / 480VDC)															
Display	Touch screen (optional LED)															
Communications	RS232 / RS485 / SNMP Card / Dry Contact															
Safety Standard	EN 50091-1 / GB4943, EMC EN 50091-2 / GB7260.2, GB/T 17626.2~5															
Environmental																
Temperature	-10°C ~ 50°C															
Relative Humidity	95 % (Non-Condensing)															
Cooling	Forceful Ventilation (Speed Shift Blower)															
Altitude	Rated Power at 1000m (-1% Rated Power per 100m, 4000m Max)															
Noise	60 ~ 65dB															
Enclosure Level	IP22															
Dimension(mm)	390x725x1220			555x725x1220			800x745x1400			800x800x1800			1100x800x1800		1400x1100x2000	
Net Weight(KG)	200	220	260	300	360	480	550	900	1020	1220	1550	2500	2850			